


Wiring Instructions for 44161 Monitor in Utilimaster Stepvans

This harness went to the old 5.6" monitor and can be discarded after you cut the 4 wires off that you need for splicing.

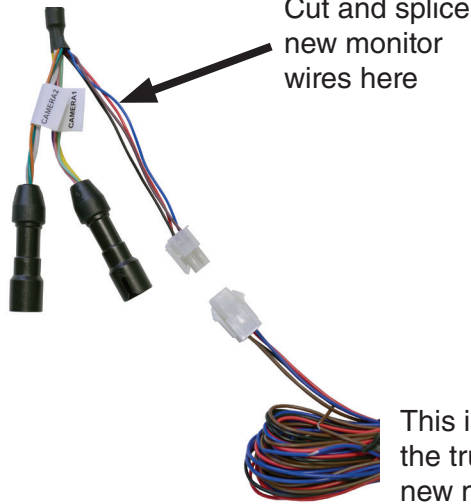


Cut and splice new monitor wires here

The new monitor comes with a harness that will need 4 wires spliced to your existing system. To make things simpler, you can re-use your existing 4 plug connectors. Just splice your 4 wires into the monitor side, and plug back into the power side of your system. This way you can unplug it at any time.


This is the power harness that is in the truck and will bring power to the new monitor and camera.

Connect camera to CA1

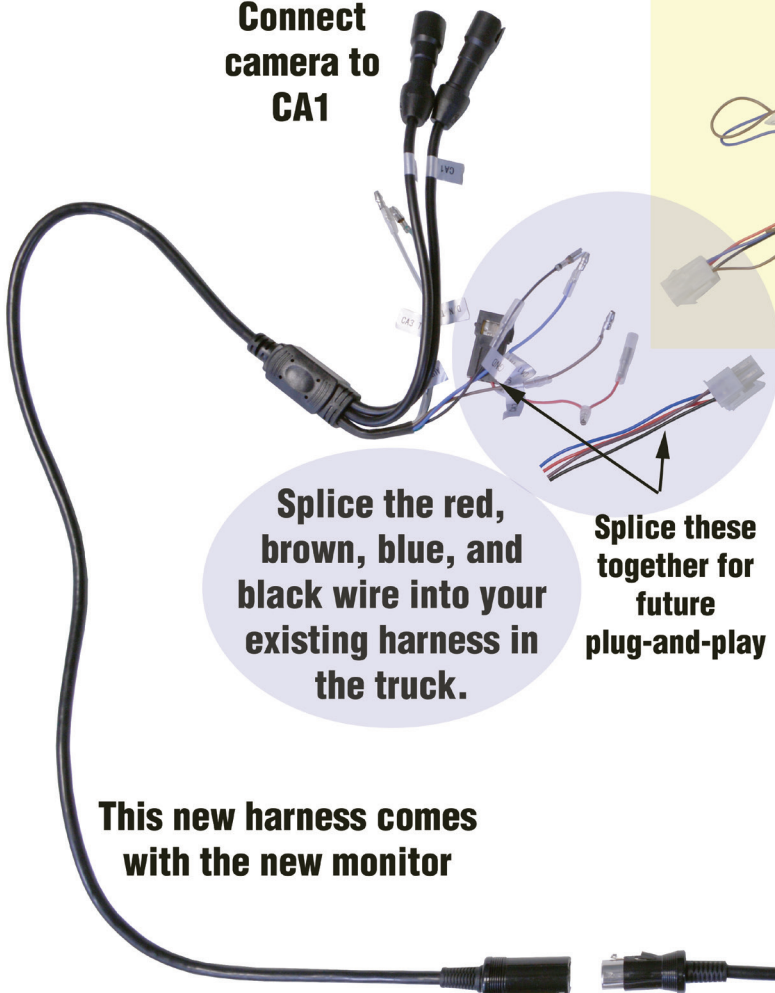

Splice the red, brown, blue, and black wire into your existing harness in the truck.

Splice these together for future plug-and-play

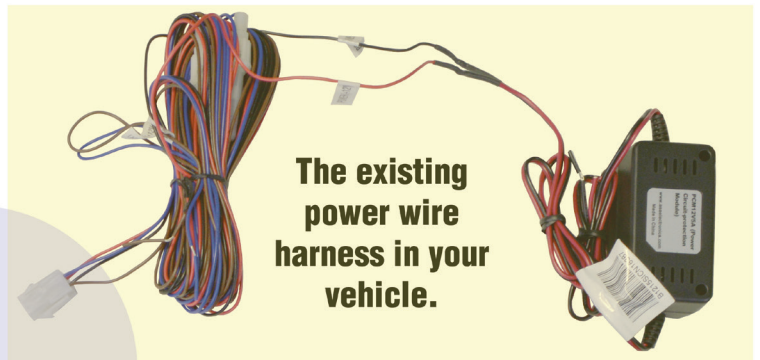

The existing power wire harness in your vehicle.



New 7" Monitor Replaces your 5.6" Monitor

This new harness comes with the new monitor

Use CA2 & CA3 for up to 3 cameras